

NOTICE OF REVISION (NOR)			1. DATE (YYMMDD) 95-06-13	Form Approved OMB No. 0704-0188
This revision described below has been authorized for the document listed.				
Public reporting burden for this collection is estimated to average 2 hours per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503. PLEASE DO NOT RETURN YOUR COMPLETED FORM TO EITHER OF THESE ADDRESSES. RETURN COMPLETED FORM TO THE GOVERNMENT ISSUING CONTRACTING OFFICER FOR THE CONTRACT/ PROCURING ACTIVITY NUMBER LISTED IN ITEM 2 OF THIS FORM.			2. PROCURING ACTIVITY NO.	
			3. DODAAC	
4. ORIGINATOR	b. ADDRESS (Street, City, State, Zip Code) Defense Electronics Supply Center 1507 Wilmington Pike Dayton, OH 45444-5270	5. CAGE CODE 67268	6. NOR NO. 5962-R140-95	
a. TYPED NAME (First, Middle Initial, Last)		7. CAGE CODE 67268	8. DOCUMENT NO. 5962-89824	
9. TITLE OF DOCUMENT Microcircuits, Linear, 5.0 V, Voltage Reference, Monolithic Silicon		10. REVISION LETTER		11. ECP NO.
		a. CURRENT New	b. NEW A	No registered users
12. CONFIGURATION ITEM (OR SYSTEM) TO WHICH ECP APPLIES All				
13. DESCRIPTION OF REVISION  Sheet 1: Revisions ltr column; add "A". Revisions description column; add "Changes in accordance with NOR 5962-R140-95". Revisions date column; add "95-06-13". Revision level block; add "A". Rev status above sheet number 1 and 4, add "A". Sheet 4: Table I, Output short circuit current test ( $I_{OS}$ ), delete "50" mA max and substitute "60" mA max. Revision level block; add "A".				
14. THIS SECTION FOR GOVERNMENT USE ONLY				
a. (X one)	<input checked="" type="checkbox"/>	(1) Existing document supplemented by the NOR may be used in manufacture.		
	<input type="checkbox"/>	(2) Revised document must be received before manufacturer may incorporate this change.		
	<input type="checkbox"/>	(3) Custodian of master document shall make above revision and furnish revised document.		
b. ACTIVITY AUTHORIZED TO APPROVE CHANGE FOR GOVERNMENT DESC-ELDS		c. TYPED NAME (First, Middle Initial, Last) Michael A. Frye		
d. TITLE Chief, Microelectronics Branch	e. SIGNATURE Michael A. Frye		f. DATE SIGNED (YYMMDD) 95-06-13	
15a. ACTIVITY ACCOMPLISHING REVISION DESC-ELDS	b. REVISION COMPLETED (Signature) Marcia B. Kelleher		c. DATE SIGNED (YYMMDD) 95-06-13	

REVISIONS													
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED										
REV													
SHEET													
REV													
SHEET													
REV STATUS OF SHEETS	REV												
	SHEET	1	2	3	4	5	6	7	8				
PMIC N/A	PREPARED BY <i>Rick Offin</i>		DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444  MICROCIRCUITS, LINEAR, 5.0 VOLTS, VOLTAGE REFERENCE, MONOLITHIC SILICON										
<b>STANDARDIZED MILITARY DRAWING</b>	CHECKED BY <i>Charles E. Basore</i>												
	APPROVED BY <i>[Signature]</i>												
THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE  AMSC N/A	DRAWING APPROVAL DATE 11 OCTOBER 1989		SIZE <b>A</b>	CAGE CODE <b>67268</b>	<b>5962-89824</b>								
REVISION LEVEL		SHEET 1 OF 8											

DESC FORM 193  
SEP 87


U.S. GOVERNMENT PRINTING OFFICE: 1987 - 748-129/60911  
5962-E1489

**DISTRIBUTION STATEMENT A.** Approved for public release; distribution is unlimited.

**1. SCOPE**

**1.1 Scope.** This drawing describes device requirements for Class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices".

**1.2 Part number.** The complete part number shall be as shown in the following example:

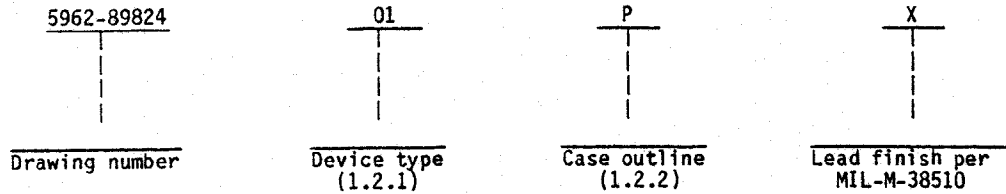

**1.2.1 Device types.** The device types shall identify the circuit function as follows:

Device type	Generic number	Circuit function	$V_{OUT}$ (V)	$DV_{OUT}/dT$
01	AD586S	5 V voltage reference	$\pm 0.10$ V	20 ppm/ $^{\circ}$ C
02	AD586T	5 V voltage reference	$\pm 0.025$ V	10 ppm/ $^{\circ}$ C

**1.2.2 Case outline.** The case outline shall be as designated in appendix C of MIL-M-38510, and as follows:

Outline letter	Case outline
P	D-4 (8-lead, .405" x .310" x .200"), dual-in-line package

**1.3 Absolute maximum ratings. 1/**

Input voltage $V_{IN}$ to ground - - - - -	+36 V dc
Power dissipation ( $P_D$ ) <sup>2/</sup> - - - - -	500 mW
Storage temperature range - - - - -	-65 $^{\circ}$ C to +150 $^{\circ}$ C
Lead temperature (soldering, 10 seconds) - - - - -	+300 $^{\circ}$ C
Thermal resistance, junction-to-case ( $\theta_{JC}$ ) - - - - -	See MIL-M-38510, appendix C
Thermal resistance, junction-to-ambient ( $\theta_{JA}$ ) - - - - -	110 C/W

**1.4 Recommended operating conditions.**

Ambient operating temperature range ( $T_A$ ) - - - - -	-55 $^{\circ}$ C to +125 $^{\circ}$ C
---	---------------------------------------

1/  $T_A = +25^{\circ}$ C, unless otherwise noted.

2/ Must withstand the added  $P_D$  due to short circuit test; e.g.  $I_{OS}$ .

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>	5962-89824	
	REVISION LEVEL	SHEET 2	

2. APPLICABLE DOCUMENTS

2.1 Government specification, standard, and bulletin. Unless otherwise specified, the following specification standard, and bulletin of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

BULLETIN

MILITARY

MIL-BUL-103 - List of Standardized Military Drawings (SMD's).

(Copies of the specification, standard, and bulletin required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices," and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Case outline. The case outline shall be in accordance with 1.2.2 herein.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-STD-883 (see 3.1 herein). The part shall be marked with the part number listed in 1.2 herein. In addition, the manufacturer's part number may also be marked as listed in MIL-BUL-103 (see 6.6 herein).

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89824
		REVISION LEVEL	SHEET 3

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C < T <sub>A</sub> < +125°C V <sub>IN</sub> = 15 V unless otherwise specified	Device types	Group A subgroups	Limits		Units
					Min	Max	
Quiescent current	I <sub>CC</sub>		A11	1,2,3		3	mA
Output voltage error	V <sub>OUT</sub>	T <sub>A</sub> = +25°C	A11	1		10	mV
			02	12		2.5	
Output voltage temperature coefficient	DV <sub>OUT</sub> /dT		01	2,3		20	ppm/°C
			02			10	
Positive gain adjustment	V <sub>ADJ+</sub>		A11	1,2,3	+300		mV
Negative gain adjustment	V <sub>ADJ-</sub>		A11	1,2,3	-100		mV
Line regulation	V <sub>Rline</sub>	11.4 V ≤ V <sub>IN</sub> ≤ 36 V	A11	1,2,3		150	μV/V
Load regulation, sourcing	V <sub>Rload</sub>	I <sub>L</sub> = 0 to 10 mA	A11	1,2,3		150	μV/mA
Load regulation, sinking	I <sub>OUT</sub>	I <sub>L</sub> = -10 to 0 mA T <sub>A</sub> = +25°C	A11	1		400	μV/mA
Output short circuit current	I <sub>OS</sub>	To ground	A11	1,2,3		50	mA

3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-BUL-103 (see 6.6 herein). The certificate of compliance submitted to DESC-ECS prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-STD-883 (see 3.1 herein) and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-STD-883 (see 3.1 herein) shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change. Notification of change to DESC-ECS shall be required in accordance with MIL-STD-883 (see 3.1 herein).

3.9 Verification and review. DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

<b>STANDARDIZED MILITARY DRAWING</b>	SIZE A	5962-89824	
	DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	REVISION LEVEL	SHEET 4

Device types	01 and 02
Case outline	P
Terminal number	Terminal symbol
1	NC
2	V <sub>IN</sub>
3	NC
4	GND
5	Trim
6	V <sub>OUT</sub>
7	NC
8	Noise reduction

NC = No connection

FIGURE 1. Terminal connections.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89824
		REVISION LEVEL	SHEET 5

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with section 4 of MIL-M-38510 to the extent specified in MIL-STD-883 (see 3.1 herein).

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

- a. Burn-in test, method 1015 of MIL-STD-883.
  - (1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).
  - (2)  $T_A = +125^\circ\text{C}$ , minimum.
- b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.
- c. Optional subgroup 12 is used for grading the part selection at  $+25^\circ\text{C}$ , it is not included in PDA.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

- a. Tests shall be specified in table II herein.
- b. Subgroups 4, 5, 6, 7, 8, 9, 10, and 11 in table I, method 5005 of MIL-STD-883 shall be omitted.
- c. Optional subgroup 12 is used for grading the part selection at  $+25^\circ\text{C}$ .

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in Table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883:
  - (1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).
  - (2)  $T_A = +125^\circ\text{C}$ , minimum.
  - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89824
		REVISION LEVEL	SHEET 6

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (per method 5005, table I)
Interim electrical parameters (method 5004)	---
Final electrical test parameters (method 5004)	1*, 2, 3, 12
Group A test requirements (method 5005)	1, 2, 3, 12
Groups C and D end-point electrical parameters (method 5005)	1

\* PDA applies to subgroup 1.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-38510, the device specified herein will be inactivated and will not be used for new design. The QPL-38510 product shall be the preferred item for all applications.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-481 using DD Form 1693, Engineering Change Proposal (Short Form).

6.4 Record of users. Military and industrial users shall inform Defense Electronic Supply Center when a system application requires configuration control and the applicable SMD. DESC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DESC-ECS, telephone (513) 296-6022.

6.5 Comments. Comments on this drawing should be directed to DESC-ECS, Dayton, Ohio 45444, or telephone (513) 296-5375.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89824
		REVISION LEVEL	SHEET 7



6.6 Approved source of supply. An approved source of supply is listed in MIL-BUL-103. Additional sources will be added to MIL-BUL-103 as they become available. The vendor listed in MIL-BUL-103 has agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DECS-ECS. The approved source of supply listed below is for information purposes only and is current only to the date of the last action of this document.

Military drawing part number	Vendor CAGE number	Vendor similar part number <u>1/</u>
5962-8982401PX	51640	AD586SQ/883B
5962-8982402PX	51640	AD586TQ/883B

1/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE number

51640

Vendor name and address

Analog Devices  
804 Woburn Street  
Wilmington, MA 01887

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-89824
		REVISION LEVEL	SHEET 8

DESC FORM 193A  
SEP 87

\* U. S. GOVERNMENT PRINTING OFFICE: 1988-550-547