


DS2153, DS2143, DS21Q43 SIMPLIFIED ETS 300 011 S/W LOOP DESCRIPTION (12/5/96)

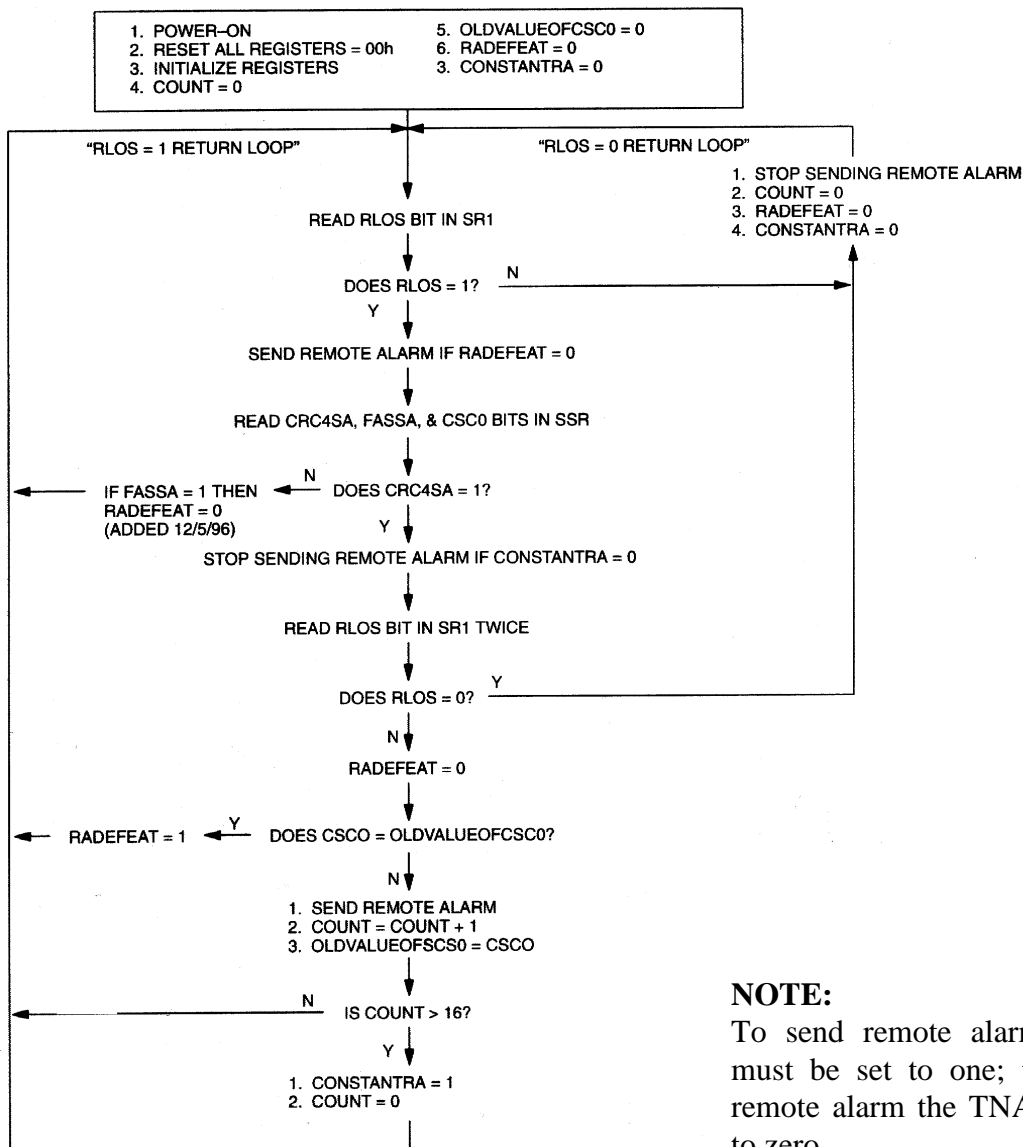

NOTE:

To send remote alarm, the TNAF.5 bit must be set to one; to stop sending the remote alarm the TNAF.5 bit must be set to zero.